

## Engaging Digital Signage with Rapid Video Response


Engineered for rapid video and data response the LDT Series LCD Monitors are optimized for stunning video display or messaging content. With native 1366x768 resolution you can effectively engage your audience with video and digital display in retail, education, and corporate applications. A built-in scheduling utility automates operations and content displayed. Additionally, these high contrast monitors incorporates features such as motion shift and gamma selections to help expand the life of the monitor.

You'll find the features and performance of the LDT Series LCD Monitors to fit your needs for retail, corporate and education applications.

- Native 1366x768 WXGA Resolution
- High Contrast Ratio (1200:1) and Brightness (500cd/m<sup>2</sup>) for clear and bright viewing
- Fast Response Times of 6ms (gray-to-gray) for reproducing clear moving images
- Screen saver functions to help expand the life of the LCD panel
- Built-in scheduling functions to automate on/off times per input signals

# LDT321V | LDT371V

32", 37" LCD MONITOR

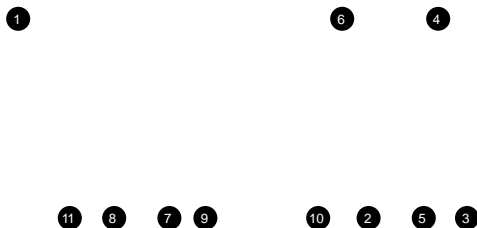


1. AC IN conector  
Connects with the supplied power cord.
2. RGB 1 IN (DVI-D)  
To input digital RGB signals from a computer or HDTV device having a digital RGB output.  
\*This connector does not support analog input.
3. RGB 2 IN (mini D-Sub 15 pin)  
To input analog RGB signals from a personal computer or other RGB equipment.
4. RGB 3 [R, G, B, H, V] (BNC)  
IN connector: To input analog RGB signals or signals from other RGB equipment. A Sync-on-Green signal can be connected to the G connector.

5. RGB OUT connector (BNC)  
To output the signal from RGB 3 IN connector.
6. DVD/HD connector (BNC)  
Connecting equipment such as a DVD player, HDTV device, or Laser disc player.
7. AUDIO IN 1, 2, 3  
Input audio signal from external equipment such as a computer, VCR or DVD player.
8. AUDIO OUT  
Output the audio signal from the selected AUDIO IN source.

9. VIDEO INPUT/OUTPUT CONNECTOR  
VIDEO IN connector (BNC and RCA): Input a composite video signal. BNC and RCA are not available at the same time. (Use only one input).  
VIDEO OUT connector (BNC): Output the composite video signal from the VIDEO IN source.  
S-VIDEO IN connector (DIN 4 pin): Input the S-video (Y/C separate signal).
10. RS232 CONTROL (mini D-sub 9pin)
11. EXTERNAL SPEAKER TERMINAL  
Output the audio signal from the selected audio source.

	LDT321V	LDT371V
	32" LCD MONITOR	37" LCD MONITOR
RESOLUTION	1366 x 768 WXGA	
BRIGHTNESS	500 cd/m2	
VIEWABLE SIZE	31"viewable	36"viewable
PIXEL PITCH	0.600(H) x 0.600(V)	0.5105(H) x 0.5105(V)
CONTRAST RATIO	1200:1	
WEIGHT (NET)	38.0 lbs (17.24 kg)*	44.1 lbs (20.00 kg)
RESPONSE TIME	12ms (typ) (GTG: 6ms(typ))	
VIEWING ANGLE	Up 88/Down 88/Left 88/Right 88(typ) @ CR10	
COLOR	16,777,216	
PC INPUT	Video Input/Output Level Ⓟ (Analog Input) Analog RGB: 0.7Vp-p Input Impedance 75 ohm; (Digital Input) TMDS (Input)	
SYNC INPUT/OUTPUT LEVEL	(Analog Input) Separate: TTL level (+/-) 2.2k ohm terminated	
INPUT CONNECTORS	(Analog Input) BNC (R,G,B,H,V), Mini D-sub 15pin.; (Digital Input) DVI-D (with HDCP compliant)	
OUTPUT CONNECTORS	D-sub 15pin (Analog)	
VIDEO INPUT	Composite 1.0V p-p Input Impedance 75 ohm BNC and RCA-Input (exclusive), Y/C Y:1.0Vp-p C:0.3Vp-p Input Impedance 75 ohm S-Terminal-Input, Component 1.0/0.7V p-p Input Impedance 75 ohm BNC-Input (HDTV: 50/60Hz)	
VIDEO OUTPUT	Composite 1.0V p-p Input Impedance 75 ohm BNC-Output	
AUDIO INPUT	RCA pin-jack L/R 2 input, stereo mini jack 1(3.5 mm) input	
AUDIO LINE-OUT	RCA pin-jack L/R 1output (Variable)	
CONTROL INPUT	Mini D-sub 9pin (RS232C)	
SYNC	Separate TTL level (Positive/Negative)	
POWER CONSUMPTION	160W*	195W
REMOTE CONTROL	Yes	
PLUG AND PLAY	Yes VESA DDC2B, DDC/CI	
DIMENSION (W/O STAND)	31.1"(W) x 18.7"(H) x 5.24"(D)	35.79"(W) x 21.49"(H) x 5.24"(D)
VESA COMPATIBLE	12 Holes (100mm pitches)	
POWER SUPPLY	2.1-0.9A @ 100-240 VAC	
CURRENT RATING	1.6A @ 100-120V, 0.67A @ 220-240V*	2.1 A @ 100 - 120V, 0.9 A @ 220 - 240V
OPTIONAL ACCESSORIES	¥ Multi-purpose fix mount (CTM-VESA) ¥ Speakers (SP-371V for LDT371V, SP-321V for LDT321V)	
WARRANTY	3-years parts and labor, toll-free 24 x 7 technical support, available onsite warranty repairs and service	
	*Approximate values	

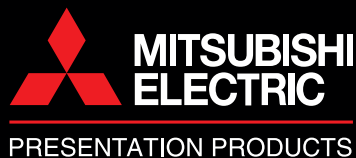

MITSUBISHI DIGITAL ELECTRONICS AMERICA, INC.  
Presentation Products Division  
Toll Free: 888.307.0349  
Email: ppdinfo@mdea.com  
www.mitsubishi-presentations.com

Canada  
Mitsubishi Electric Sales Canada Inc.  
Information Technologies Group  
Phone: 905.475.7728  
www.mitsubishielectric.ca



©2006 Mitsubishi Digital Electronics America, Inc. Standard features, options and specifications subject to change without notice. Microsoft, Windows, and the Windows logo are registered trademarks of Microsoft Corporation. Mac and the Mac logo are trademarks of Apple Computer, Inc, registered in the U.S. and other countries. All other trademarks or registered trademarks are the property of their respective holders.

PP6035-07/06-15M-LITLDT321V/371V