




SP-371V

Optional Accessory Speakers for LDT371V LCD Monitor

Part Number	SP-371V (designed for LDT371V)
Frequency Response	100Hz – 20kHz
Power	7W + 7W @ 8 ohms with 10% THD
Dimensions	2.9" (W) x 21.5" (H) x 3.3" (D)
Weight	2.0 lbs (net)
Contents	Speakers (2), Speaker wire (2), Mounting brackets (4), Speaker screws (12), Quick Start Guide

Follow these steps to connect the speakers to your LCD monitor:

1. Turn off the power switch on the LCD.
2. Screw appropriate mounting brackets into the appropriate position on each speaker (2 brackets per speaker) using black screws. Figure 1. (2 screws per bracket.)
3. Screw mounting brackets / speakers to the LCD using one (1) black screw per bracket. Figure 2.
4. Once both speakers are attached to the LCD, connect the speaker wires to the terminals on the LCD and then to the terminals on attached speakers. Figure 3.
5. Turn the LCD power on.

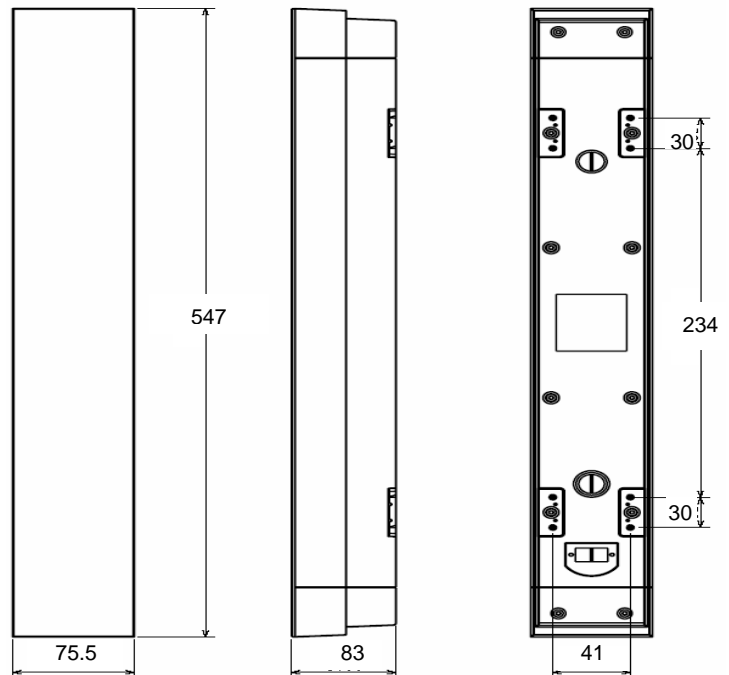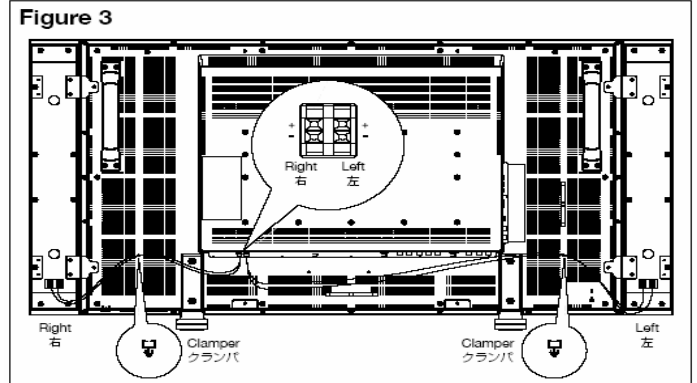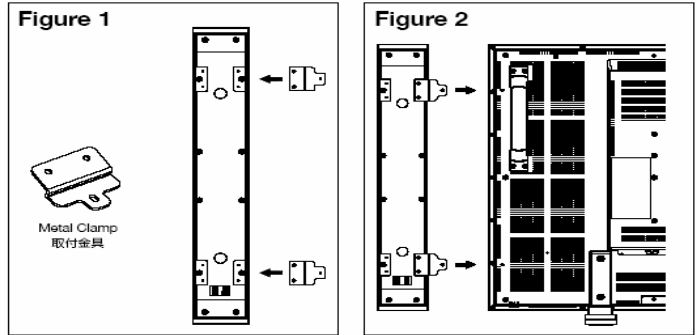

(Measurements in millimeters)



Presentation Products Division
9351 Jeronimo Road,
Irvine CA 92618
(888) 307-0349

✉: ppdinfo@mdea.me.com

Technical Support
(888) 307-0309

✉: tsupport@mdea.me.com

Canada Mitsubishi Electric
Sales Inc. Information
Technology Group
Markham, Ontario
(905) 475-7728

©2006 Mitsubishi Digital Electronics
America, Inc. Standard features,
options and specifications subject to
change without notice. All trademarks
are the property of their respective
holders.