




FL7000U

Input and Output Terminals

- 1 REMOTE IN and OUT terminals
- 2 LAN terminal
- 3 SERIAL terminal (D-SUB 9-pin)
- 4 USB (COMPUTER) terminal
- 5 COMPUTER/COMPONENT VIDEO DVI-D (HDCP) terminal (DVI-D 24-pin)
- 6 COMPUTER / COMPONENT VIDEO IN 1 terminals (R/Ps, G/Y, B/Ps, H/HV, V) (BNC)
- 7 Main power switch O : OFF I : ON
- 8 Power jack
- 9 AUDIO IN 1 terminal (Mini jack)
— The AUDIO IN 1 terminal is used for both COMPUTER 1 and DVI input.
- 10 AUDIO IN 2 terminal (Mini jack)
- 11 COMPUTER/COMPONENT VIDEO IN 2 terminal (Mini D-SUB 15-pin)
- 12 MONITOR OUT terminal (Mini D-SUB 15-pin)
- 13 AUDIO OUT terminal (Mini jack)
- 14 VIDEO IN and audio input terminals
- 15 S-VIDEO IN and audio input terminals

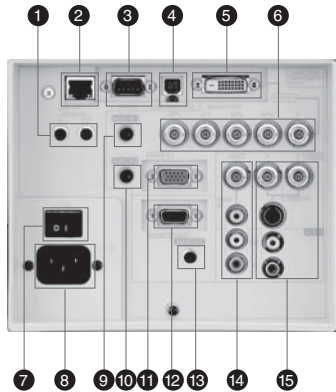


Optional Lenses Line-UP

- | | | | |
|---|--|--|--|
| OL-X500SZ
Short Throw
Zoom Lens
(1.4 - 1.7) | OL-X500LZ
Long Throw
Zoom Lens
(2.5 - 3.5) | OL-X500TZ
Tele Throw
Zoom Lens
(3.7 - 5.5) | OL-X500FR(F)
Rear Projection Short Throw
Fix Lens with Front Cabinet
(0.9) |
|---|--|--|--|



* For those who already have OL-X500FR, a front cabinet CA-XL6600(FR) is necessary for use.

Dimensions (unit: mm, inch)

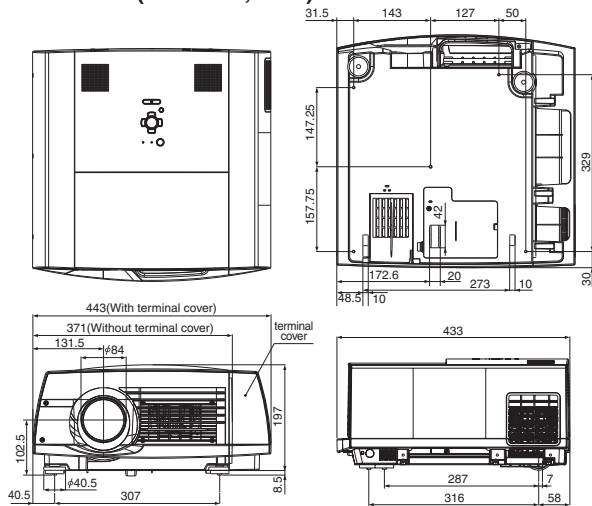

Specifications

Model	FL7000U
Display technology	1.1" 3-LCD (with micro lens)
Resolution	1920 x 1080 (Total 2,073,600 pixels)
Brightness	5000 ANSI Lumens
Contrast ratio	1000:1 (on/off)
Projection lens	f=51-64mm, F1.8-2.1
Throw ratio	2.01 - 2.56
Offset axis	10 : 0 (default) with variable H + V powered lens shift (excluding OL-X500FR)
Zoom / Focus	Motorized Zoom & Focus
Picture size	60" - 250" (Diagonal)
Source lamp	220W (Shut Off Time 4000Hrs) with Low mode, 275W (Shut Off Time 2000Hrs) with Standard mode
Computer compatibility	Resolution: 640 x 400 (Expand) - 1920 x 1080 (Real) - 1600 x 1200 (Compress) Sync on Green available
Video compatibility	NTSC / NTSC 4.43 / PAL (including PAL-M, N) / SECAM / PAL-60, Component Video: 480i/p (525i/p), 576i/p (625i/p), 720p (750p 50/60Hz), 1080i (1125i 50/60Hz), 1080p (1125p 50/60Hz), (1080i (1250i 50Hz) is not available) SCART (RGB + 1V sync, only Mini D-Sub 15pin Terminal)
Input terminals	PC: 5 BNC x 1, Mini D-Sub 15pin x 1, DVI-D(with HDCP) x 1, PC Audio: Stereo mini jack (φ3.5mm) x 2 Video: RCA x 1 or BNC x 1, S-VIDEO (4pin) x 1 or S-VIDEO Y/C (BNC), Video Audio: RCA (L/R) x 2
Output terminals	RGB: Min D-Sub 15 pin x 1, Audio: Stereo mini jack (φ3.5mm) x 1 (Variable Out)
Communication terminals	LAN (RJ-45): x 1 (Projector control), RS-232C: D-Sub 9pin x 1 (Direct command is available), USB: x 1 (for Mouse Cursor Control), Wired remote (IN): x 1 (φ3.5mm Stereo mini jack), Wired remote (OUT): x 1 (φ3.5mm Stereo mini jack)
Audio speaker	10W Mono
Dimensions (W x H x D)	17.4 x 8.1 x 17.1 inch (Including Detachable Terminal Cover)
Weight	9.8kg / 21.6lbs (Excluding Detachable Terminal Cover)
Power supply	AC100 - 240V, 50/60Hz
Accessories	Replacement Lamp (VLT-XL6600LP), Optional Lens: OL-X500SZ, OL-X500LZ, OL-500TZ, OL-X500FR(F), Hard shell rolling case: XL7000-ATAC, Ceiling Mount: XL5950CM
Warranty	3-Years Parts/Labor, 3-Years Express Replacement Assistance, 1-Year or 500 hours lamp warranty (whichever comes first)

• Compliance with ISO21118-2005

• All brand names and product names are trademarks, registered trademarks or trade names of their respective holders.

* Lamp life specification is an estimate based on information provided by the lamp manufacturer and is not the duration of the warranty. Lamp will shut-off automatically when usage reaches the specified estimated maximum lamp hours.


Projection Distance with Optional Lenses

Screen Size (inch)	OL-X500SZ		OL-X500LZ		OL-X500TZ		OL-X500FR							
	Shortest (Wide)		Longest (Tele)		Shortest (Wide)		Longest (Tele)							
	inch	m	inch	m	inch	m	inch	m						
60	74	1.9	90	2.3	-	-	-	-	41	1.0				
80	100	2.5	121	3.1	161	4.1	228	5.8	236	6.0	357	9.1	56	1.4
100	125	3.2	152	3.9	203	5.2	286	7.3	296	7.5	448	11.4	71	1.8
150	189	4.8	229	5.8	307	7.8	432	11.0	448	11.4	675	17.1	108	2.7
200	253	6.4	305	7.8	411	10.4	577	14.7	599	15.2	902	22.9	-	-
250	317	8.1	-	-	515	13.1	722	18.4	751	19.1	1129	28.7	-	-


Screen Size and Projection Distance

Refer to the following table to determine the screen size and projection distance.

Front projection



Front projection, ceiling mounting



Diagonal size	Screen Size				Projection distance (L)				Lens movable range						
	Height (H)		Width (W)		Shortest (Wide)		Longest (Tele)		H1		H2		W1		
	inch	cm	inch	cm	inch	m	inch	m	inch	cm	inch	cm	inch	cm	
60	152	29	75	52	133	104	2.6	133	3.4	15	38	4	10	3	7
80	203	39	100	70	177	140	3.5	178	4.5	20	51	5	13	4	9
100	254	49	125	87	221	175	4.5	223	5.7	25	63	7	17	4	11
150	381	74	187	131	332	264	6.7	336	8.5	37	94	10	25	7	17
200	508	98	249	174	443	354	9.0	449	11.4	49	125	13	34	9	22
250	635	123	311	218	553	443	11.2	-	-	62	156	17	42	11	28

* The above figures are approximate and may be slightly different from the actual measurements.

MITSUBISHI ELECTRIC
VISUAL SOLUTIONS AMERICA
 Professional Product Sales
 Phone: 888.307.0349
 www.mitsubishi-presentations.com



PRESENTATION PRODUCTS

MITSUBISHI ELECTRIC SALES
CANADA, INC.

Display & Imaging Solutions Division
 Phone: 905.475.7728
 www.mitsubishielectric.ca